



KF 80/60 Ultra



APPLICATION

BUNDREX® KF 80/60 Ultra is cold-drawn collated steel fiber with hooked ends for optimal anchorage.

It provides best solution for

- Slab On Grade
- Precast

PACKAGING




20 kg paper bag



1,000 kg HDPP bag

GEOMETRY

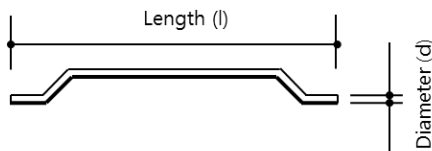

Dimensions & Appearance

- Length (l) 60.0 mm
- Diameter (d) 0.75 mm
- Aspect Ratio (l/d) 80

Material Properties

- Tensile strength 1,800 MPa


Stuffing (Standard Export Packing)

- 20kg paper bag x 50 units or 1,000kg HDPP bag on a pallet
- 20 Pallets in a 20 ft dry container

STORAGE



Keep Dry



Do Not Stack

CERTIFICATES



FOR MORE INFORMATION

- www.kosteel.co.kr
- www.steelfiber.co.kr
- Telephone: Int+ 82. (0)2. 2106. 0135
- Facsimile: Int+ 82. (0)2. 2106. 0240
- E-mail: steelfiber@kosteel.co.kr