



Super Bundrex 80/60 CA



APPLICATION

SUPER BUNDREX® 80/60 CA is cold-drawn collated monofilament steel fiber with optimal anchorage.

It provides best solution for

- S.O.G and S.O.P,
- Precast

PACKAGING




20 kg paper bag



1,000 kg PP bag

GEOMETRY

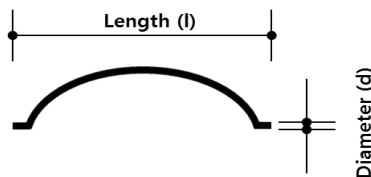

Dimensions & Appearance

- Length (l) 60.0 mm
- Diameter (d) 0.75 mm
- Aspect Ratio (l/d) 80

Material Properties

- Tensile strength 1,800 MPa


Stuffing (Standard Export Packing)

- 20kg paper bag x 50 units or 1,000kg PP bag on a pallet
- 20 Pallets in a 20 ft dry container in two layers

STORAGE



Keep Dry



Do Not Stack
in three layers

CERTIFICATES



FOR MORE INFORMATION

- www.kosteel.co.kr
- www.steelfiber.co.kr
- Telephone: Int+ 82. (0)2. 2106. 0135
- Facsimile: Int+ 82. (0)2. 2106. 0240
- E-mail: steelfiber@kosteel.co.kr